

<u>Satcom/TV PowerTower - SATPT-33, SATPT-40</u> <u>Installation Instructions</u>






SATPT kit contents

- [] 1 x SATPT
- [] 1 x SATPT Base Seal [19050]
- [] 4 x Nylon Shouldered Washers [64004]

Also Required:

- 4 x M10 Stainless Steel bolts, large washers and nuts to attach SATPT to deck/arch. Length to suit deck/arch thickness.
- 10.5mm Drill.
- Hole Cutter for cable loom; approx 50[2"] or 60[2.4"]mm dia.

Drilling Guide 1:1 drilling guide follows below.

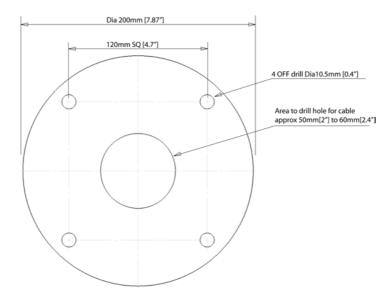


Fitting SATPT

- 1. Drill holes in arch to match SATPT base and a central cable exit See drilling guide.
- 2. Thread the cable loom up through the arch, base seal and into the SATPT.
- 3. Pull enough cable through the SATPT and through the antenna's base seal to reach the antenna.
- 4. Once enough cable has been pulled through fasten the SATPT to the arch, ensuring foam Base Seal is positioned under the SATPT base.
- 5. With antenna sitting on it's base seal, fasten the antenna to the top plate with the bolts supplied and attach cable.



Drilling template for SATPT-33, SATPT-40 Base at 1:1 NOTE: Do not scale when printing, always print at 100%

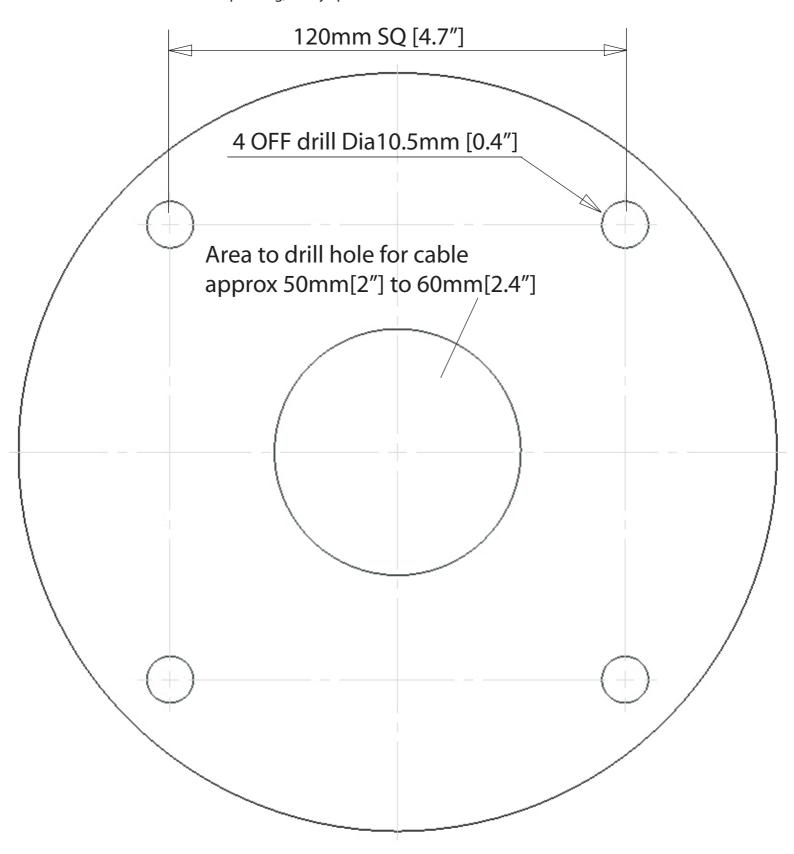



<u>Satcom/TV PowerTower - SATPT-60</u> <u>Installation Instructions</u>



SATPT-60 kit contents

[] 1 x SATPT-60

[] 1 x Base Seal [19083]


[] 4 x Nylon Shouldered Washers [64004]

[] 2 x Scanstrut stickers [40113]

Also Required:

- 4 x M8 Stainless Steel bolts, large washers and nuts to attach SATPT to deck/arch. Length to suit deck/arch thickness.
- 8.5mm Drill.
- Hole Cutter for cable loom; 65mm[2.5"] dia.

Drilling Guide

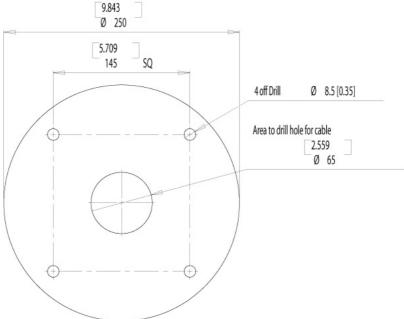

Fitting SATPT-60

- 1. Drill holes in arch to match SATPT-60 base and a central cable exit See drilling guide.
- 2. Thread the cable loom up through the arch, base seal and into the SATPT-60.
- 3. Pull enough cable through the SATPT-60 and through the antenna's base seal to reach the antenna.
- 4. Once enough cable has been pulled through fasten the SATPT-60 to the arch, ensuring foam Base Seal is positioned under the SATPT-60 base.
- 5. With antenna sitting on it's base seal, fasten the antenna to the top plate with the bolts supplied and attach cable.